

ELECTRICAL VEHICLE ANALIZING USING MATLAB

- 1.P.Sureshkumar, Assistant Professor, Department of Mechanical Engineering JCT College of Engineering & Technology, Coimbatore, India.
- 2.Dr.J.Niresh, Assistant Professor Department of Automobile Engineering PSG College of Technology, Coimbatore, India.
- 3.S.Tamilselvi ,Software Trainer ,Department of Placement & Training, Sri Krishna College of Engineering &Technology, Coimbatore, India.
4. Dr.T.Nithyanandhan, Assistant Professor, Department of Mechanical Engineering, Sri Krishna College of Technology, Coimbatore, India.
5. Dr.V. Saravanan, Associate Professor, Department of Aeronautical Engineering, Nehru Institute of Technology, Coimbatore, India.

Abstract:

Because the globe's oil reserves are running out and because driving contributes to air pollution, many academics are exploring for alternative energy sources to power cars. One strategy is to employ an electric vehicle, sometimes referred to as an auto - ignition motor substitute. This study's initial step involves simulating the flow of power in the power system for electric cars in order to ascertain its characteristics. Power flow effectiveness is crucial since electric cars are so dependent on the battery's finite supply of electrical energy. This calls for careful handling. In order to verify that the amount of electrical energy consumed is acceptable, this research will evaluate power flow calculations. To provide the most effective electrical reactivity to the electric car energy system, a tiny electric vehicle model is created using the MATLAB/Simulink programme.

Keywords:Electro chemical battery, induction motor, self-Recharging, electric cars, and E-bikes.

Introduction

High levels of population movement are the indications of development success. Services that increased mobility needed a way to get about. A car is one of the modes of transportation utilised in towns and cities. The majority of the time in Indonesia, oil is utilised to fuel the vehicle. The increase in gasoline-powered vehicles is a result of the time's low global oil prices as well as an excessive supply of fuel [3]. Fuel use for transportation is rising more quickly. Transportation accounts for more than half of all energy usage worldwide. Figure 1 shows the stark discrepancies between global oil output and gasoline demand beyond 2020 [8]. Fuel supplies are getting limited due to increased fuel oil usage for vehicles [8],[11]. Moreover, using fuel oil in automobiles results in exhaust fumes that may contaminate the environment. Vehicle exhaust contains 25% CO₂, 18% solid particles, 27% volatile mixture (including 28% Pb, 32% NO, and 62% CO), and 25% CO₂ [2]. The noise level is a further drawback of this kind of vehicle. Human health [5] and the environment [1] are two additional effects of air pollution. One solution to these issues is to switch from using fuel oil to using electricity

to power vehicles. Electric vehicles are being created as a human attempt to lessen environmental pollution and reliance on fossil fuels [3],[6],[12]. The electric motor, which serves as the vehicle's drive system, electricity generation sources, control systems, which serve as the vehicle's centralized control, and power converters, which convert electrical energy sources to meet the variable necessities of the electric drive by switching devices, are its main constituents. As for electric cars, its primary energy source is often a battery [2], [3], [6]. Nevertheless, the batteries in electric cars have a flaw that limits their capacity and service life, making it difficult to make the required preparations for charging the batteries. To get the energy required by an electric car, a real power model of the vehicle's energy system. The battery's capacity has also been determined by tests [10] using the battery in operational state. Moreover, research has been done to produce hybrid electric vehicles that use both a flywheel and battery for power[7]. If the vehicle is in the acceleration phase, flywheel energy is employed as an alternative. The battery is used to store the energy that is not used for regenerative braking through the flywheel. A dynamic model of an entire electric car, including the traction motors, batteries, controllers, inverters, and braking, has also been built [9]. The model was created using Matlab and Simulink (Mathworks). Statistical techniques were also used to construct the MATLAB/Simulink prediction model for electrical energy in electric vehicles [4].

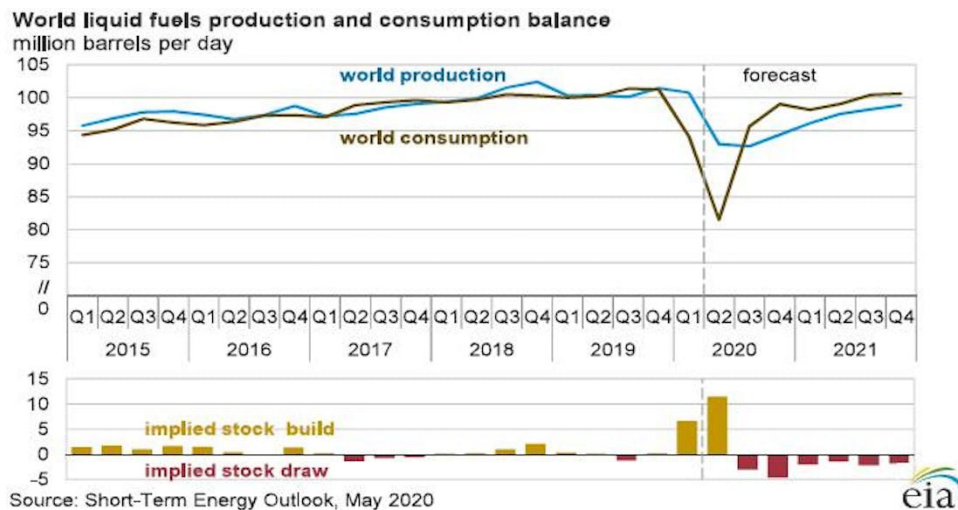


FIG 1 Stark Discrepancies between Global Oil Output and Gasoline Demand Beyond 2020

METHODOLOGY

High voltage, motor voltage, temperature, and other variables are all simulated, from which we derive simulated outputs. Without having to carry a laptop around with the real programme results, these metrics are constantly monitored on a display that may be mounted in an EV.




FIG 2

Simulink software was used in this project to create a model that was tailored to our needs and produced outcomes like SOC and SOH. Once the necessary library files have been installed in Simulink software, these results are subsequently transmitted to a board, in this case, a pi 3 model B. The user is always able to see these outcomes on a display.

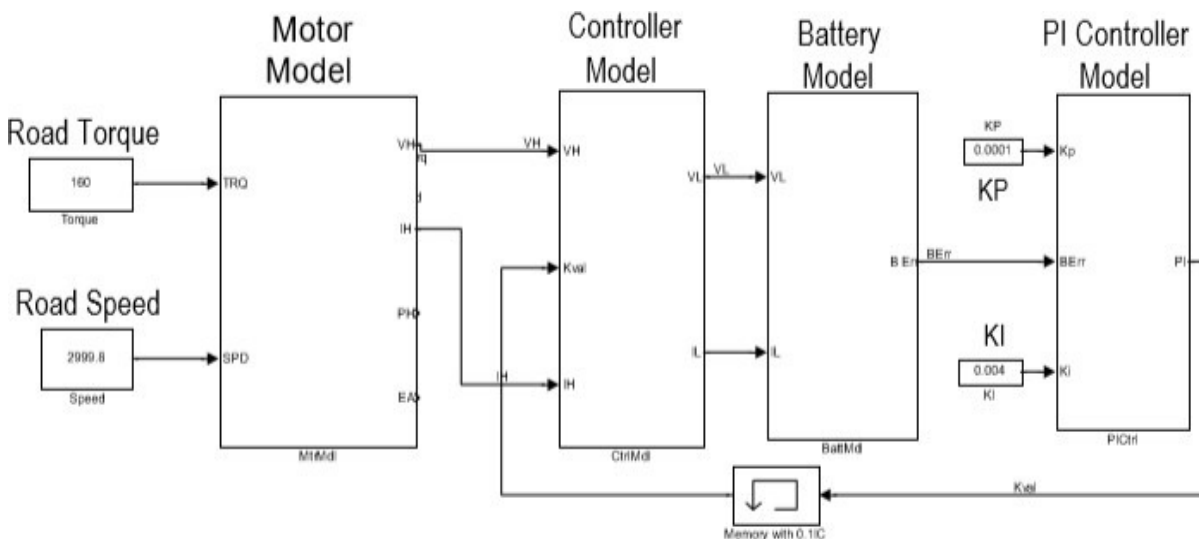


FIG 3

The power flow while driving and regeneration are both studied using the aforementioned simulation model, which models a basic electrical car motor-drive system. The simulation includes a DC permanent magnet motor, an optimal motor controller connected with a pi controller, and the battery of the electric vehicle. The model may be used to evaluate energy flow and electric drive efficiency under certain acceleration and torque load conditions. A few crucial system parameters were specified, while others were modelled with idealised values. building and verifying a solid MATLAB/Simulink model. A specified set of operating and regenerating speed/torque parameters were then used to calculate the system's performance as well as energy flow.

RESULT

The DC motor's produced torque is oriented in the direction of rotation when both rotational speed and torque have positive values. This type of driving is typical. Yet, the motor is forced and operates as a generator when the torque opposes the speed.

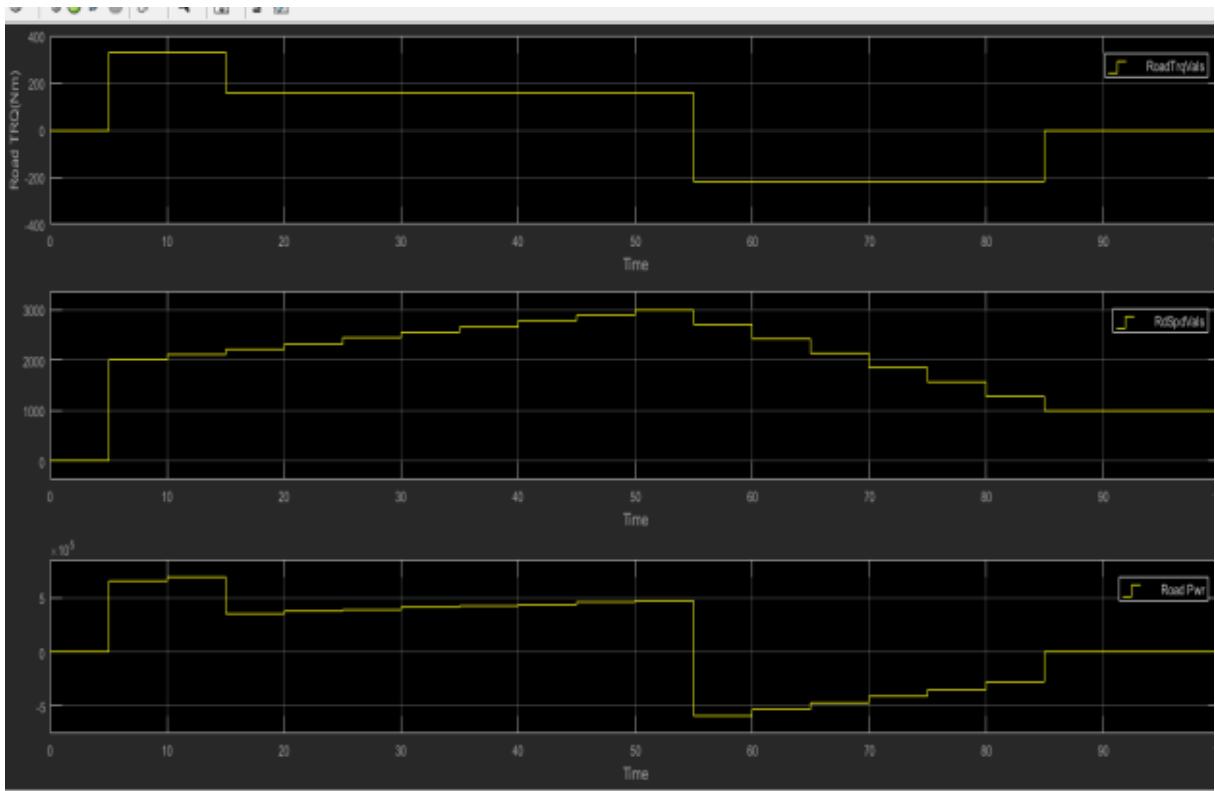


FIG 4

The motor is operating in the driving mode, commonly referred to as the first quadrant, which denotes that power is being transmitted from the ev motor to the load, when the rotational speed and torque have the same polarity. The motor is being pressed by an outside mechanical force when the torque is negative and the rpm is favorable. The battery gains energy as a result.

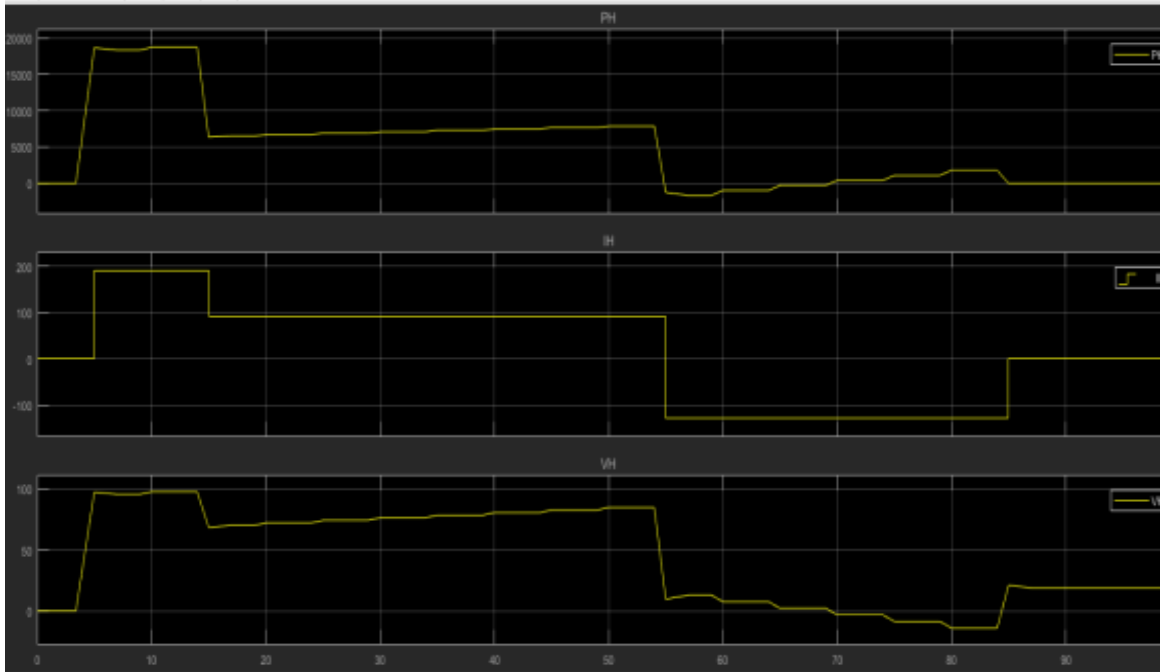


FIG 5

Motor Volt, Current, and Power. The motor uses the battery to generate power. The voltage and speed curves and the torque and current curves may both be seen to typically follow one another in Figures 5 and 6. The formulae for voltage and torque are reflected in this basic connection. On the Motor Power figure in Figure 6, combined motoring and regeneration are shown. Positive numbers for current and voltage indicate that the DC motor is supplying power to the loads and generating torque in the rotational direction. Driving like this is commonplace. The motor is pushed, however, and working as a generator when the polarization of the motor voltage and current are the opposite, with current that passes back into the battery.

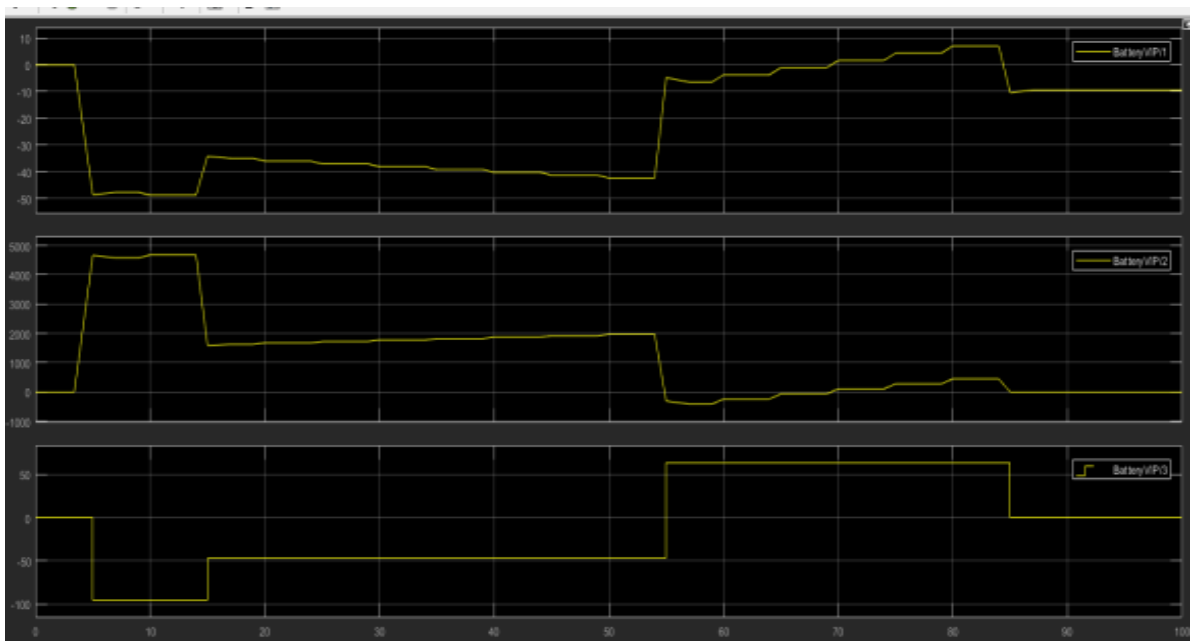


FIG 6

Fig. 7's depiction of the battery's volt, Amperage, and power shows how the motor obtains its power from the battery. Because torque is proportional to current, it is possible to see that the battery current, motor current, and current curves in Figures 5, 6, and 7 typically follow one another. As a result, the motor has to draw more battery current as the required torque grows.

The battery power diagram in Figure 7 illustrates both regeneration and mobility. The DC motor is transmitting electricity to the load and generating torque in the rotational direction when both the voltage and current have positive values. This is accepted driving practise. Yet, when the polarization of the motor electrical current and voltage are reversed, the motor is pressed and working as a generator with current that passes back into the battery.

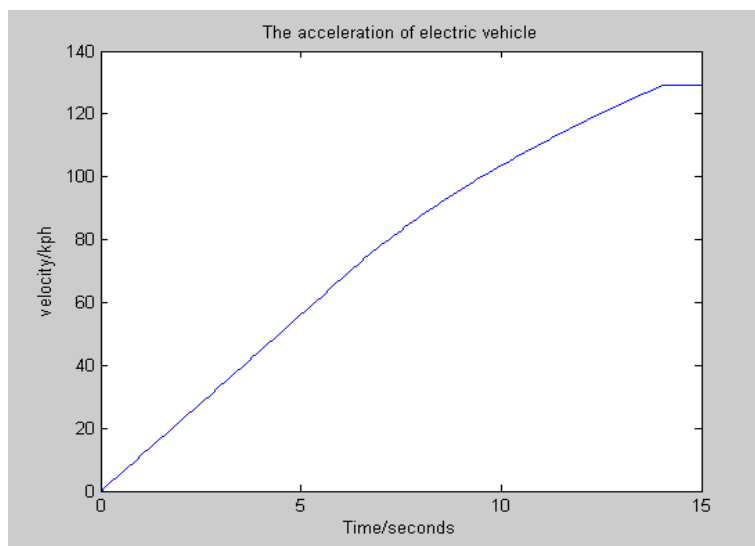


FIG 7

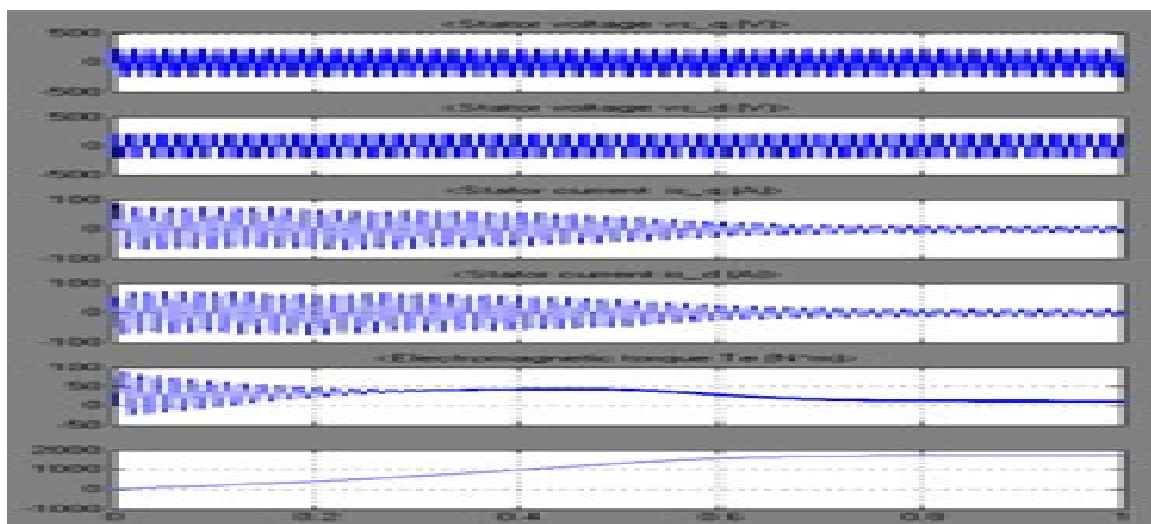


FIG 8

CONCLUSION

The development of electric vehicles requires simulation, which must be included into engineering education's learning experiences. A critical component of modern engineering development is simulation-based testing, specifically Hardware-In-The-Loop testing. This is especially true for complex embedded system subsystem-dependent sophisticated systems like hybrid and electric vehicle drive systems. This project aims to create a virtual model of an electric car to evaluate and analyse various metrics, including SOC, SOH, battery temperature, etc. The primary goal of this project was to use a time and money-effective strategy. By experimenting with different Simulink parameters, the performance of EV was modified to meet the user's needs. Moreover, all of these outcomes allowed.

REFERENCES

- [1]Bernstein, L., Intergovernmental Pa-nel on Climate Change Fourth Assessment Report Climate Change 2007: Synthesis Report Summary for Policymakers, A-vailable Jan. 2008: www.ipcc.ch
- [2]Dhameja, S., 2002, Electric Vehicle Battery Systems, Newnes, Uni-ted Stated.
- [3]Husain, I., 2003, Electric and Hybrid Vehicles Design Fundamentals, Pertama, CRC Press, United Stated.
- [4]Kim, S., Chung, S., Shin, W., Lee, J., A study of predicting model of an electrical energy balance for a conventional vehicle, Procee-dings of the 17th World Con-gress The Interna-tional Federa-tion of Automatic Control Seoul, Korea, July 6-11, 2008.
- [5]Kunzli, N., Public-Health Impact of Outdoor and Traffic- Related Air Pollution: A European Assess-ment, The Lancet, Vol. 356, Number 9232, September 2000, pp. 795- 801.
- [6]Larminie, J., Lowry, J., 2003, Electric Vehicle Technology Explained, John Wiley & Son.
- [7]Lustenader, E. L., Guess, R. H., Richter, Turnbull, F. G., De-velopment of a Hybrid Flywheel /Battery Drive System for Elec-tric Vehicle Applications, IEEE Transactions on Vehicular Tech-nology, Vol. VT-26, May 1977, pp.135- 143.
- [8]Patterson, P., Quantifying the Fuel Use and GHG Reduction Poten-tial of EVs and HEVs, Available April 26, 2002, [http://www.ott.doe.gov/pdfs/evsl7 .pdf](http://www.ott.doe.gov/pdfs/evsl7.pdf)
- [9]Powell, B. K., Bailey, K. E., Cikanek, S. R., Dynamic Modeling and Control of Hybrid Electric Ve-hicle Powertrain Systems, IEEE Control Systems. October 1998.
- [10]Septimu, M., Liviu, T., Behavior of the Lead Acid Battery after the Rest Period, WSEAS TRAN-SACTIONS on POWER SYS-TEMS, Issue 3, Volume 3, March 2008.
- [11]Wood, J. H., Long, G. R., More-house, D. F., Long Term World Oil Supply Scenarios: The Future Is Neither as Bleak or Rosy as Some Assert, US De-partment of Energy, 2004. Ava-ilable Jan.

2008:http://www.eia.doe.gov/pub/oil_gas/petroleum/feature_articles/2004/worldoilsupply/oilsupply04.html

[12]Ying, S., Ding, S., Yang, J., Hung, R., Electrochemistry Theorem Ba-sed State-of-Charge Estimation of the Lead Acid Batteries for Electric Vehicles, WSEAS Tran-sactions on Systems, Issue 10, Volume 7, October 2008, pp.10-92- 1103.